




080 GEL STRIPPER



Pool & Surrounds Coatings



Industrial Coatings

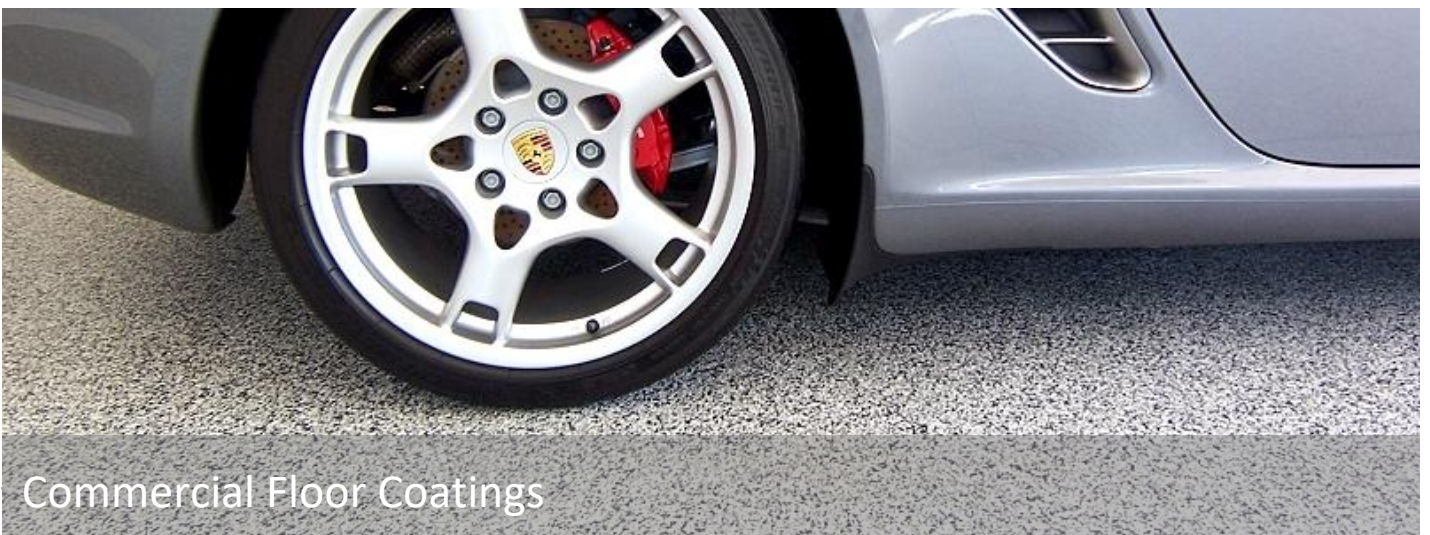

Commercial Floor Coatings

This product is a very strong surface active agent formulated to soften existing damaged paint so that it can be removed.

FEATURES & BENEFITS

- * Softens old or damaged coatings
- * Does not contain methylene chloride

PERFORMANCE GUIDE & COMPARISON (Refer to Performance Evaluation Guide below)

Product	Ease of Application	Preparation	Durability**	Maintenance**
080	Medium	Low	N/A	N/A

Characteristic	Typical Value
Colour	Gel
Solids (vol. %)	<10%
Gloss	N/A
Pack Sizes	20 Litre
Abrasion Resistance	N/A
Chemical Resistance	N/A
Solvent Resistance	N/A

Performance Evaluation Guide

Description	Evaluation and Meaning
Ease of Application	The level of effort and expenditure to apply the coating, combined with level of expertise. <i>High = very easy to apply; Medium = easy to apply; Low = presents challenges for inexperienced users.</i>
Preparation	The level of effort and expense for preparing the substrate for coating. <i>High = a high level of effort and expertise required for preparation; Medium = modest preparation required; Low = low to no preparation required.</i>
Durability	The expected performance under standard Australian conditions for weathering and temperature variation. <i>High = High level of durability under extreme conditions; Medium = meets or exceeds standard conditions; Low = meets standard conditions, but not expected to endure.</i>
Maintenance	The level of continued coating support, or re-coating to achieve the same level of performance. <i>High = a high level of effort and expenditure in cleaning, or re-coating the system; Medium = a modest level of effort and expenditure for cleaning to keep the coating looking good and performing well; Low = almost no effort to support the coating system after application.</i>

** The expected lifespan of any coating is dependent on the location, weather and traffic the surface is subjected to. It is advisable to inspect the surface after 3, 6, 12 and 18 months from the initial application date to determine if it requires recoating and or maintenance. In light use areas, protected from adverse weather conditions the coating will last longer.

Issued: 29 June 2017

Manufactured in Australia | everglaze.net.au | +61 7 3808 6999
For further information consult the Safety Data Sheet or contact Everglaze

APPLICATION

Apply using a solvent resistant broom.

Spread-rate:

	Minimum	Maximum	Typical
Theoretical Spread Rate (m ² /L)	1	3	2
Wet Film Thickness (µm)	N/A	N/A	N/A
Dry Film Thickness (µm)	N/A	N/A	N/A

Dry Times**

Substrate Temperature	5°C	10°C	20°C	30°C
Surface Dry (minutes)	N/A	N/A	N/A	N/A
Hard Dry (hours)	N/A	N/A	N/A	N/A
Recoat Time (hours)	N/A	N/A	N/A	N/A

** Drying times are generally related to air circulation, temperature, and film thickness. The figures given above are typical with good ventilation, typical film thickness and single coat application.

SURFACE PREPARATION

Remove any residue that will restrict the gel from penetrating the surface. Allow surface to fully dry as water will dilute and reduce gel activity. It is recommended that surfaces are clean (free from any dirt, grease or other foreign matter) and dry. Concrete shall be firm, clean and dry, any imperfections must be repaired before application. Prepare concrete surface by water blasting or grinding to provide the appropriate surface profile for optimum keying.

DIRECTIONS FOR USE

Do not apply in direct sun. Start applying at the lowest point and pour stripper over 4 to 5 square metres then scrub into the surface using a solvent resistant broom. Allow stripper to soften the surface then scrape off and remove the majority of damaged paint. Remove remainder by water blasting away from area still to be stripped. Waste must be disposed of in accordance with federal, state and local environmental control regulations.

This product shall not be applied on to substrates known to suffer from rising damp or having a relative humidity greater than 80%.

This Product Data Sheet is to be used as a guide only; it is NOT a specification.

SAFETY

This product contains flammable solvents. Keep away from heat and flame. No smoking. Provide adequate ventilation and wear protective clothing. Consult the Safety Data Sheet.

Failure to observe these precautions will void all warranties and guarantees for product performance. The manufacturer will take no responsibility for coatings, products, labour, corrective action, or compensation where there is evidence of a failure to abide by the manufacturer's directions.

CLEAN UP

T060 Thinner.

Issued: 29 June 2017

Manufactured in Australia | everglaze.net.au | +61 7 3808 6999
For further information consult the Safety Data Sheet or contact Everglaze

DISCLAIMER & CUSTOMER RESPONSIBILITY

Industry standards recommend the accurate recording of times and dates, batch numbers, consumption rates and environmental conditions including substrate and air temperatures, humidity levels and dew point readings during both the application and curing processes. Full material warranties cannot be provided unless all the relevant data has been recorded accurately. The technical information and application advice given here is based on the best information available at the time of print. As the information herein is of a general nature, no assumption can be made as to the products suitability for a particular use or application. Field support, where provided, does NOT constitute supervisory responsibility. Suggestions made by Everglaze either verbally or in writing may be followed, modified or rejected by the owner, engineer or contractor since they are responsible for carrying out procedures appropriate to a specific application. If in doubt contact Everglaze technical department for advice.