




639 EXTRA GRIP ADDITIVE

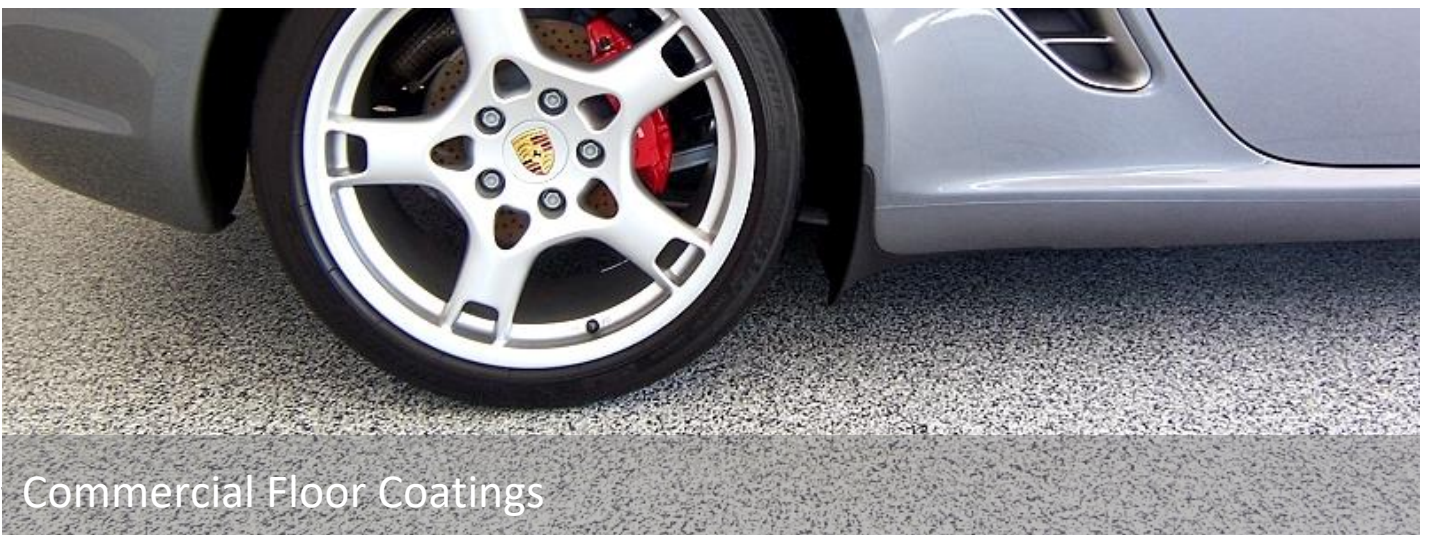

A crushed glass particle that is broadcast to achieve optimal texture qualities with a resin based floor coating system.

FEATURES & BENEFITS

- * Easy to use
- * Excellent slip resistance

- * Particle size 0.45mm – 0.62mm
- * Extreme abrasion resistance

PERFORMANCE GUIDE & COMPARISON (Refer to Performance Evaluation Guide below)

Product	Ease of Application	Preparation	Durability	Maintenance
639	Medium	Medium	High	Medium

Characteristic	Typical Value
Colour	Clear
Solids (vol. %)	%
Gloss	Low
Pack Sizes	1 kilogram, 2 kilogram, 5 kilogram, 10 kilogram and 20 kilogram pails
Abrasion Resistance	Excellent
Chemical Resistance	Excellent
Solvent Resistance	Excellent

Performance Evaluation Guide

Description	Evaluation and Meaning
Ease of Application	The level of effort and expenditure to apply the coating, combined with level of expertise. <i>High = very easy to apply; Medium = easy to apply; Low = presents challenges for inexperienced users.</i>
Preparation	The level of effort and expense for preparing the substrate for coating. <i>High = a high level of effort and expertise required for preparation; Medium = modest preparation required; Low = low to no preparation required.</i>
Durability	The expected performance under standard Australian conditions for weathering and temperature variation. <i>High = High level of durability under extreme conditions; Medium = meets or exceeds standard conditions; Low = meets standard conditions, but not expected to endure.</i>
Maintenance	The level of continued coating support, or re-coating to achieve the same level of performance. <i>High = a high level of effort and expenditure in cleaning, or re-coating the system; Medium = a modest level of effort and expenditure for cleaning to keep the coating looking good and performing well; Low = almost no effort to support the coating system after application.</i>

Issued: 29 June 2017

Manufactured in Australia | everglaze.net.au | +61 7 3808 6999
For further information consult the Safety Data Sheet or contact Everglaze

APPLICATION

Can be broadcast by hand.

Spread-rate:

	Minimum	Maximum	Typical
Theoretical Spread Rate (m ² /kg)	5	10	7.5
Wet Film Thickness (µm)	N/A	N/A	N/A
Dry Film Thickness (µm)	N/A	N/A	N/A

Dry Times**

Substrate Temperature	5°C	10°C	20°C	30°C
Surface Dry (minutes)	N/A	N/A	N/A	N/A
Hard Dry (hours)	N/A	N/A	N/A	N/A
Recoat Time (hours)	N/A	N/A	N/A	N/A

** Drying times are generally related to air circulation, temperature, and film thickness. The figures given above are typical with good ventilation, typical film thickness and single coat application.

SURFACE PREPARATION

It is recommended that surfaces are clean (free from any dirt, grease or other foreign matter) and dry.

DIRECTIONS FOR USE

Broadcast granules by hand into wet sealer. After drying apply a second coat of sealer

SAFETY

Provide adequate ventilation and wear protective clothing. Consult the Safety Data Sheet.

Failure to observe these precautions will void all warranties and guarantees for product performance. The manufacturer will take no responsibility for coatings, products, labour, corrective action, or compensation where there is evidence of a failure to abide by the manufacturer's directions.

CLEAN UP

N/A

DISCLAIMER

Do not apply this product if there is uncertainty about application or surface preparation. This Product Data Sheet is to be used as a guide only; it is NOT a specification.